

Pipe Fittings, SAE Boss Fittings, Adapters and Adapter Unions are always available when you want them—any quantity, any style—from one of Anchor's strategically located plants.

Write for complete information

**ANCHOR** ANCHOR COUPLING CO. INC.  
379 North Fourth Street  
Libertyville, Illinois

Branch Plants: Dallas, Texas  
Plymouth, Michigan • Los Angeles, California  
Wilmington, Delaware • Atlanta, Georgia

Circle Service No. 28


## SHAPES OF THINGS TO COME!

"BALANCED" SHAPES. PLUS UNSURPASSED RUBBER TEXTURES. Superb quality Weldon Roberts Erasers you should come by immediately. For the finest, fastest pencil erasing and cleaning you've ever witnessed. Easing, speeding the work you do every day. Write us on your firm's letterhead for a free sample of any or all of these exceptional erasers. Complete catalog describing all erasers you'll want and use will be sent on request.



No. 1000 Hexo Cleaner. Hexagonally shaped, medium size, soft pink cleaning eraser of matchless quality for pencil erasures and cleaning work on drawings, thin papers, tracing cloths, books, fabrics, wall-papers. (No. 1010, large size).

No. 444 NILE. Medium size, top quality eraser, oblong bevel shape, for general and drafting room use. Long a favorite among engineers and draftsmen. (No. 445, large size).



No. 310 CORALINE. Soft, pink, medium size eraser for pencil work and cleaning. Bias-beveled ends for erasing single letters and details, broad surfaces for cleaning large areas. (No. 315, large size).

**WELDON ROBERTS RUBBER CO.**  
365 Sixth Avenue,  
Newark, N. J. 07107  
World's Foremost  
Eraser Specialists

**Weldon Roberts Erasers**  
CORRECT MISTAKES IN ANY LANGUAGE

## DESIGN DATA

### 1963 Design Data Cross-Index

Accumulator Capacity for Oil-Hydraulic Systems . . . . .	Mar. 6	90
Allowances and Unit Stresses in Force Fits, Nomograms for . . . . .	Dec. 11	130
Analysis of Statically Determinate Non-Coplanar Force Systems . . . . .	June 26	86
Angle, Right, Trigonometric Functions for Fractional Parts of a . . . . .	May 15	199
Approximate Fluid Flow . . . . .	May 15	201
Area, Surface, of an Ellipsoid . . . . .	Mar. 6	93

Beams on Elastic Foundation . . . . .	Jan. 23	100
Beams, Maximum Deflection and Natural Frequency of . . . . .	Feb. 6	84
Beams, Tapered Cantilever, Deflections of . . . . .	Feb. 20	78
Bodies of Constant Density, Properties of . . . . .	Sept. 4	72

Cam Mechanism with Translating Followers . . . . .	Nov. 27	92
Cantilever Beams, Tapered, Deflections of . . . . .	Feb. 20	78
Cells, Dry, Performance Characteristics of Commonly Used . . . . .	Aug. 21	66
Chord Length-Chord Height Nomograms for Parabolas . . . . .	Aug. 21	64

Circle Divided into Equal Parts, Trigonometric Functions for a . . . . .	May 15	203
Circular Cylinder, Thin . . . . .	Oct. 2	110
Coefficients for Flat Plates, Deflection-Influence . . . . .	June 26	91

Combined Stress of Irregularly Shaped Sections . . . . .	Sept. 18	106
Comparisons, Degree-Radian . . . . .	Mar. 20	85
Computers, Graphic . . . . .	Feb. 6	78
Constant Density, Properties of Bodies of . . . . .	Sept. 4	72
Constants Containing $\pi$ . . . . .	July 24	68
Constants of Integration for Second-Order Systems . . . . .	Apr. 17	84

Conversion Chart, Rotational Unit . . . . .	July 10	75
Cubic Equations, Graphic Aid for . . . . .	Mar. 6	86
Cycloidal Curves, Simplified Construction of . . . . .	July 10	72
Cylinder, Thin Circular . . . . .	Oct. 2	110
Cylinders, Force-Fitted, Design of Finite Plates with . . . . .	Jan. 23	98
Cylinders, Pressurized, Design Criteria . . . . .	June 12	86

Deflection-Influence Coefficients for Flat Plates . . . . .	June 26	91
Deflection, Maximum, and Natural Frequency of Beams . . . . .	Feb. 6	84
Deflection, Shaft . . . . .	Dec. 11	134
Deflection, Torsional, at Tooth of Pinion . . . . .	Oct. 16	86
Deflections of Tapered Cantilever Beams . . . . .	Feb. 20	78
Degree-Radian Comparisons . . . . .	Mar. 20	85
Density, Bodies of Constant, Properties of . . . . .	Sept. 4	72
Density of Gases . . . . .	May 1	43
Design Criteria for Pressurized Cylinders . . . . .	June 12	86

## SIMPLIFY DESIGN PROBLEMS

Uneven loads will not sway, tip or tilt because off-center load is evenly distributed on both springs. Variable ratio springing adjusts self to road conditions. Deflection rate changes automatically to produce exactly right capacity to properly balance spring tension with load. Lower center of gravity without sacrifice of clearance. Only four bolts to mount . . . no assembly required. Just two friction bearings with renewable friction inserts control spring action.



**Prior LEVEL-LOAD TRAILER AXLE**

**PRIOR PRODUCTS, INC. / P. O. BOX 7608 - DALLAS, TEXAS**

Circle Service No. 29

## NEW! low cost SMALL Compressed air FILTER



ONLY \$6.00 LIST

ATTRACTIVE DISCOUNTS TO OEM

- Filters out damaging water and dirt as small as 5 micron size. Easily drained.
- New, reusable felt filter cartridge. Easily cleaned.
- 22 SCFM at 100 PSI with only 5 PSI pressure drop.
- 1/4" or 1/2" NPT.
- New polycarbonate bowl. Max. pressure, 250 PSI.

**WILKERSON CORPORATION**

Dedicated to keeping the NEW in pneumatic

WRITE TODAY for specifications and information  
1649 West Mansfield  
Englewood, Colorado

Circle Service No. 30

Design Factors, Fillet and Groove . . . . .	May 15	194
Design of Finite Plates with Force-Fitted Cylinders . . . . .	Jan. 23	98
Design of Skewed Plates . . . . .	Apr. 17	80
Determining Helical Spring Wire Sizes . . . . .	Apr. 3	88
Determining Shaft Size for Power Transmission . . . . .	July 24	64
Determining Temperature Rise of Wirewound Components . . . . .	Oct. 16	89
Discontinuity Stresses in Pressure Vessels . . . . .	Mar. 20	87
Drag and Power, Nomograms for, to Overcome the Resistance to Motion . . . . .	Aug. 7	78
Dry Cells, Performance Characteristics of Commonly Used . . . . .	Aug. 21	66
Duct Bend or Elbow, Hydraulic Forces on a . . . . .	Oct. 30	44
Ellipses, Parabolas and Hyperbolas, Rapid Graphing of . . . . .	Jan. 9	58
Ellipsoid, Surface Area of an . . . . .	Mar. 6	93
Equations, Cubic, Graphic Aid for . . . . .	Mar. 6	86
Fillet and Groove Design Factors . . . . .	May 15	194
Flat Plates, Deflection-Influence Coefficients for . . . . .	June 26	91
Fluid Flow, Approximate . . . . .	May 15	201
Fluid Flow from Partially Filled Pipes . . . . .	June 12	93
Followers, Translating, Cam Mechanism with . . . . .	Nov. 27	92
Force Fits, Nomograms for Allowances and Unit Stresses in . . . . .	Dec. 11	130
Force Systems, Analysis of Statically Determinate Non-Coplanar . . . . .	June 26	86
Forces, Hydraulic, on a Duct Bend or Elbow . . . . .	Oct. 30	44
Foundation, Elastic, Beams on . . . . .	Jan. 23	100
Four-Bar Linkage, Graphical Synthesis of the . . . . .	Aug. 7	82
Fractional Inch Reference Charts . . . . .	July 24	67
Fractional Parts of a Right Angle, Trigonometric Functions for . . . . .	May 15	199
Frequency Charts, Vibration . . . . .	Apr. 3	84


(Continued on next page)

Circle Service No. 31 ♦


DECEMBER 26, 1963



**BENDIX mechanical brake**

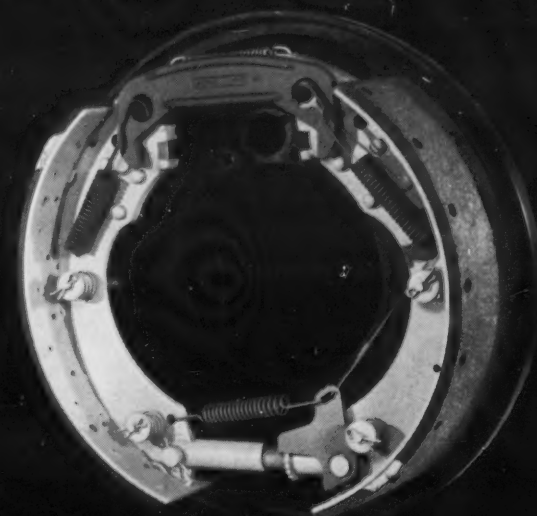

**BENDIX hydraulic brake**

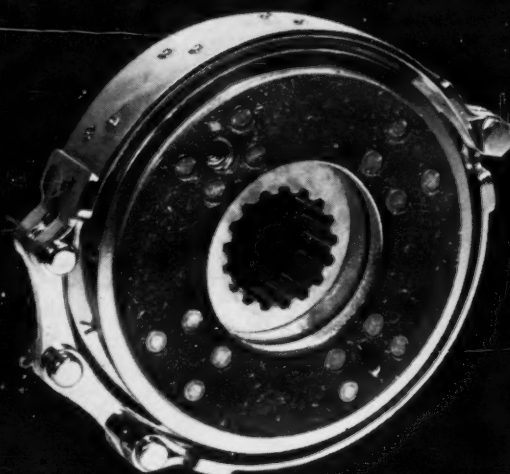

**BENDIX band/disc brake**

**BENDIX  
APPLICATIONS  
ENGINEERING**

**One of these four will solve your industrial brake problem.**

We have mechanical, hydraulic and band/disc brakes—big, medium-sized and little. The point is, we can make an honest, unbiased recommendation because we make brakes for practically any industrial application. The Bendix® hydraulic brake. The Bendix® mechanical brake. The Bendix® band/disc brake. These three—in a range of

sizes and torque capacities from 270 to 30,000 ft. lbs.—are designed to meet your needs efficiently and economically.

You can install our rugged, multi-purpose brakes in a matter of minutes. They are simple to adjust. And they hardly ever require maintenance.

For more information, write us in South Bend, Indiana.

**Bendix Products Automotive Division**







### WHO TOOK THE SPECIAL OUT OF STAINLESS PARTS?

We did! With so many designers specifying stainless it was inevitable, we had to. It's not enough to stock the world's largest variety of stainless fasteners; our reputation was at stake. We were making special parts in stainless and super alloys, why not stock them, or at least tell designers about them? We were forced to act. Our pride was at stake. Next time the spec's call out stainless, check our BIG CATALOG. It's a storehouse of information. For your personal copy, call or write.


**ALLMETAL**® SCREW PRODUCTS COMPANY, INC.

GARDEN CITY, N. Y. / EL SEGUNDO, CALIF.  
NEW YORK CITY / NEWARK, N. J. / BOSTON, MASS. / CHICAGO, ILL. / MTN. VIEW, CALIF.

Circle Service No. 32

## Ross

### filters, regulators, lubricators, mufflers

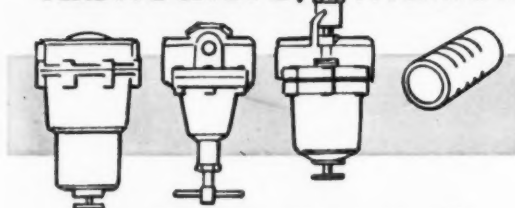

**to protect your pneumatic  
equipment and make it work better**

**FILTERS**—Manual drain and float drain models. Felt cartridge may be cleaned and reused. Filters out contaminants as small as 5 microns. Extracted water accumulates in sump, can't be drawn back into air stream. Pipe sizes 1/4" through 1".

**REGULATORS**—Self relieving. Precise regulation of supply pressures to 250 PSIG. Three pressure ranges are standard, 5-125 PSIG, 0 to 50 PSIG, 10-250 PSI. Pressure range may be changed in field. 1/4" through 1".

**LUBRICATORS**—Lubricates at any flow rate, 1 to 600 CFM. Force-feed; needle valve adjustment. Sight gauge for flow rate. 1/4" through 1".

**MUFFLERS**—Rugged and efficient yet very compact. Self contained, no cartridges or parts that require replacing.

Write for free bulletin A10013.

**ROSS OPERATING VALVE CO.**

106 E. GOLDENGATE AVE., DETROIT 3, MICHIGAN

Circle Service No. 33



Frequency, Natural, of  
Beams and Maximum  
Deflection ..... Feb. 6 84

Gases, Density of ..... May 1 43  
Geometrical Curves for  
Reference ..... Nov. 13 114

Graphic Aid for Cubic Equations ..... Mar. 6 86

Graphic Computers ..... Feb. 6 78

Graphical Integration ..... May 1 40

Graphical Synthesis of the Four-Bar Linkage ..... Aug. 7 82

Graphing, Rapid, of Ellipses, Parabolas and  
Hyperbolas ..... Jan. 9 58

Gravity, Specific, Weight and Volume ..... Jan. 9 63

Grease, Oil and, Selection Charts ..... Oct. 16 90

Groove, Fillet and, Design Factors ..... May 15 194

Helical Spring Wire Sizes, Determining ..... Apr. 3 88

Hydraulic Forces on a Duct Bend or Elbow ..... Oct. 30 44

Hyperbolas, Ellipses and Parabolas, Rapid  
Graphing of ..... Jan. 9 58

Inch (Fractional) Reference Charts ..... July 25 67

Integration, Constants of, for Second-Order  
Systems ..... Apr. 17 84

Integration, Graphical ..... May 1 40

Irregularly Shaped Sections, Combined  
Stress ..... Sept. 18 106

Keys, Rectangular, Shear and Compressive  
Stresses in ..... Feb. 20 80

Linkage, Four-Bar, Graphical Synthesis  
of the ..... Aug. 7 82

Maximum Deflection and Natural Frequency  
of Beams ..... Feb. 6 84

Motion, Resistance to, Nomograms for Drag  
and Power to Overcome the ..... Aug. 7 78

Natural Frequency of Rectangular  
Flat Plates ..... Feb. 20 74

Nomograms for Allowances and Unit Stresses  
in Force Fits ..... Dec. 11 130

Nomograms for Drag and Power to  
Overcome the Resistance to Motion ..... Aug. 7 78

Nomograms for Evaluating Plane  
Triangles ..... Oct. 2 107

Oil and Grease Selection Charts ..... Oct. 16 90


Oil-Hydraulic Systems, Accumulator  
Capacity for ..... Mar. 6 90

Parabolas, Chord Length-Chord Height  
Nomograms for ..... Aug. 21 64

Parabolas, Hyperbolas and Ellipses, Rapid  
Graphing of ..... Jan. 9 58

Performance Characteristics of Commonly Used  
Dry Cells ..... Aug. 21 66

Pi ( $\pi$ ), Constants Containing ..... July 24 68

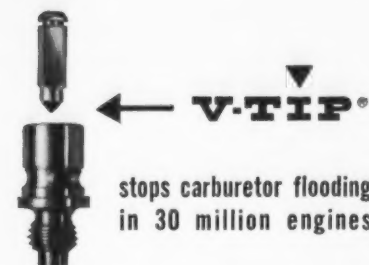

This resilient-tip needle valve\* stops flooding, stalling, and all related carburetor problems. Improves gas economy and engine performance, cuts maintenance.

Always seats positively by surrounding dirt particles. Wears better than steel: can't corrode or pit. Solid enough to prevent delayed fuel flow, a fault of metal needle and resilient seats.

30 million are now in use as original equipment and replacement units for automobiles, aircraft, chain saws, farm and garden tractors, inboard and outboard engines, power mowers, trucks, and other gasoline engines.


Update your carburetor performance with a V-TIP needle valve.

**VERNAV LABORATORIES, INC.**

Yellow Springs 5, Ohio. Phone 513 7677-7261

\*Pat. Nos. 2414577, 3090108, 3090596, OTHERS PENDING

Circle Service No. 34

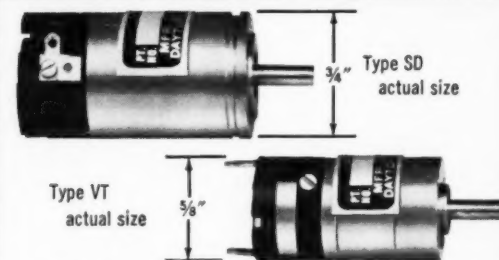

## 2 BRAND NEW D.C. MOTORS

**yes, smaller!**

We believe the new Globe SD and VT motors are the smallest and lightest permanent magnet precision d.c. motors available. Typical continuous duty output for these motors is 0.3 oz. in. and 0.25 oz. in. at 10,000 rpm. respectively. A variety of windings is offered to produce the characteristics required. Standard windings for 27 v.d.c. produce no-load speeds from 5,000 to 22,000 rpm; 3 to 50 volts standard, higher voltages available. Special units can include speed governors, gearheads, brakes, and radio noise filters. Unusual efficiency and output torque are obtained with high reliability, designed to meet MIL specs. Write for Bulletin VTD to Globe Industries, Inc., 1784 Stanley Avenue, Dayton 4, Ohio.




**GLOBE  
INDUSTRIES,  
INC.**

Circle Service No. 35

Pinion, Teeth of, Torsional Deflection at . . . . .	Oct. 16	86
Pipes, Fluid Flow from Partially Filled . . . . .	June 12	93
Plane Triangles, Nomograms for Evaluating . . . . .	Oct. 2	107
Plates, Finite, Design of with Force-Fitted Cylinders . . . . .	Jan. 23	98
Plates, Flat, Deflection-Influence Coefficients for . . . . .	June 26	91
Plates, Rectangular Flat, Natural Frequency of . . . . .	Feb. 20	74
Plates, Skewed, Design of . . . . .	Apr. 17	80
Power Transmission, Determining Shaft Size for . . . . .	July 24	64
Pressure Vessels, Discontinuity Stresses in . . . . .	Mar. 20	87
Pressurized Cylinders, Design Criteria for . . . . .	June 12	86
Properties of Bodies of Constant Density . . . . .	Sept. 4	72
Pump Chart . . . . .	Sept. 4	75
Radian, Degree-, Comparisons . . . . .	Mar. 20	85
Rapid Graphing of Ellipses, Parabolas and Hyperbolas . . . . .	Jan. 9	58
Rational Trigonometric Functions . . . . .	May 29	42
Rectangular Flat Plates, Natural Frequency of . . . . .	Feb. 20	74
Resistance to Motion, Nomograms for Drag and Power to Overcome the . . . . .	Aug. 7	78
Rotational Unit Conversion Chart . . . . .	July 10	75
Second-Order Systems, Constants of Integration for . . . . .	Apr. 17	84
Selection Charts, Oil and Grease . . . . .	Oct. 16	90
Shaft Deflection . . . . .	Dec. 11	134
Shaft Size for Power Transmission, Determining . . . . .	July 24	64
Shear and Compressive Stresses in Rectangular Keys . . . . .	Feb. 20	80
Shell Strength . . . . .	Mar. 20	82
Simplified Construction of Cycloidal Curves . . . . .	July 10	72
Skewed Plates, Design of . . . . .	Apr. 17	80
Slopes, Tapers, and Their Angles . . . . .	July 10	66
Specific Gravity, Weight and Volume . . . . .	Jan. 9	63
Spring, Helical, Determining Wire Size . . . . .	Apr. 3	88

(Continued on next page)

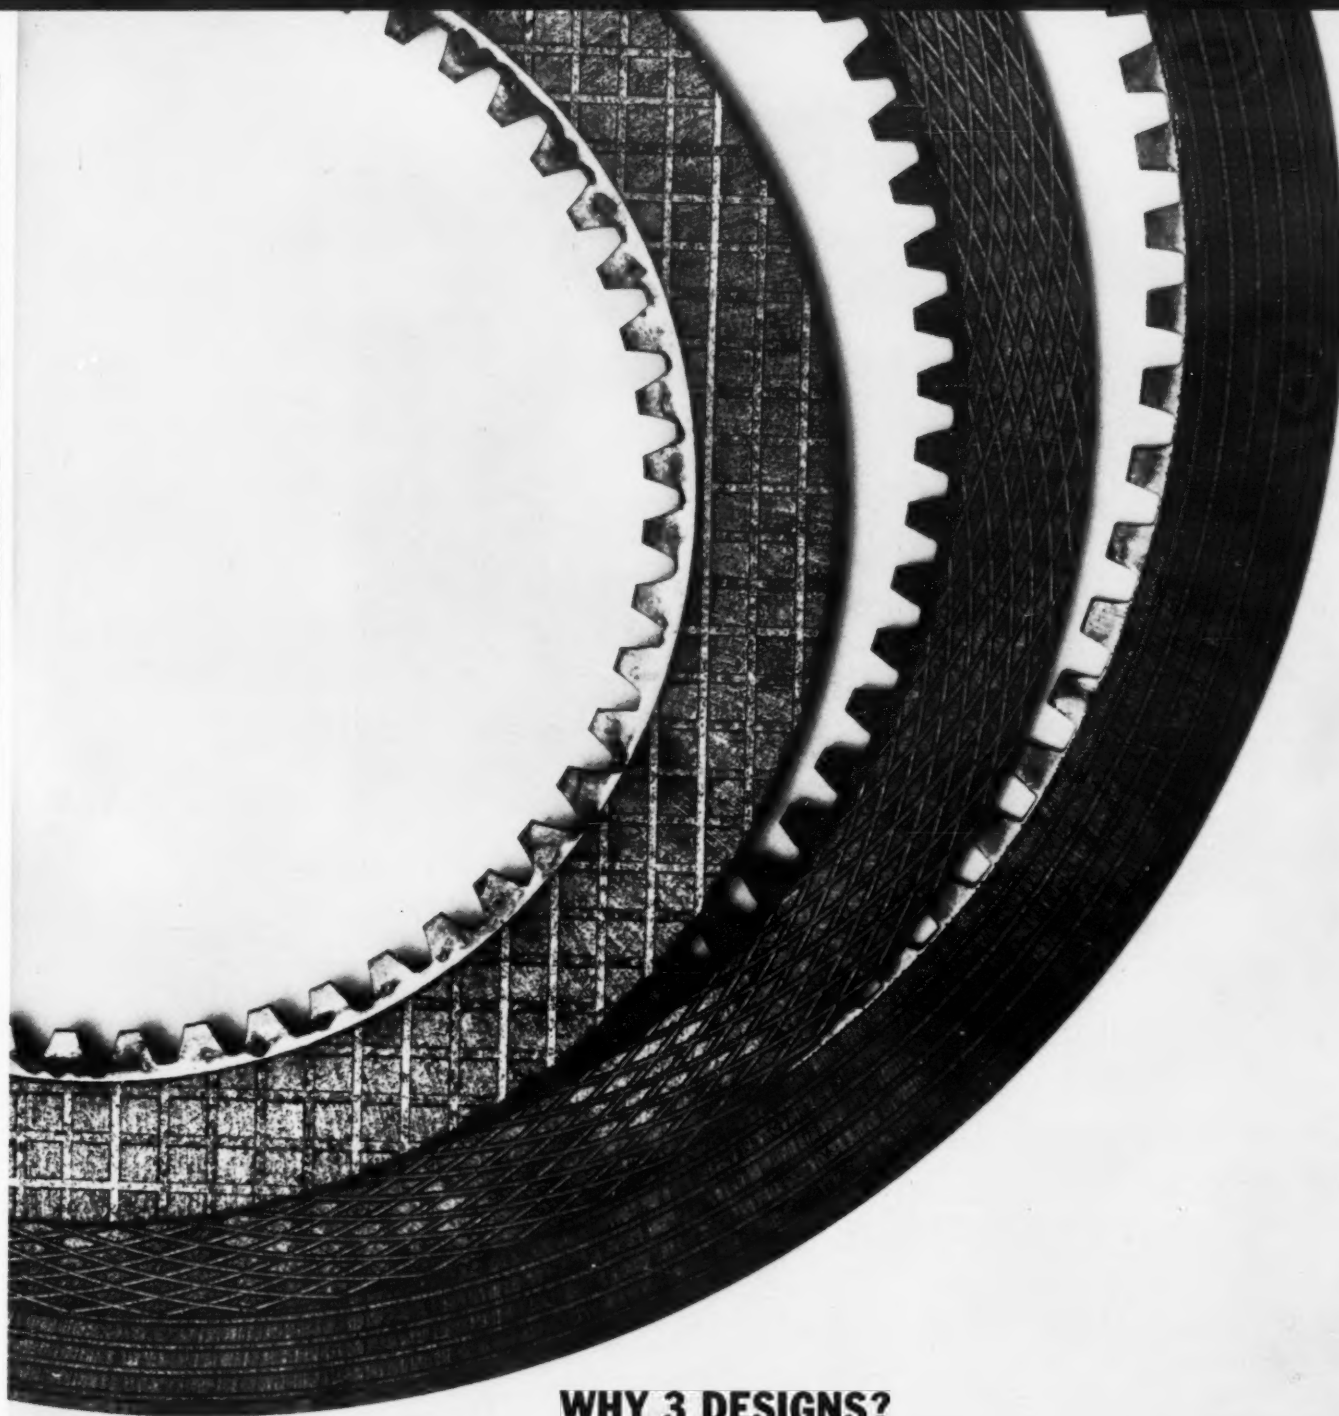

## WHY 3 DESIGNS?

Just another way Allison Powershift saves you downtime

You're looking at Allison Powershift clutch plates.

Each pattern (and there are a lot more than you see here) is made by a series of oil grooves.

They're needed so oil can both cool and lubricate the clutch plates—make them last longer, run better.

Why more than one pattern?

To meet different job requirements.

One job may call for a clutch to engage

instantly...another for continuous slip... a third for gradual engagement.

So we tailor our clutches to the job.

And we tailor our clutch materials to the job, too...use everything from cork to bronze to steel...even combine materials for better job performance...continually look for better materials.

To eliminate centrifugal forces in the transmission, we use as many stationary clutches as possible...heat treat our clutch plates both before and after metal

facings go on for greater durability.

And next time you specify a power shift transmission, make sure the clutches are job-tailored the way Allison's are.

It's a quick and easy way to save expensive downtime.

**Allison** PowerShift **POWERSHIFT**

ALLISON DIVISION OF  
GENERAL MOTORS, INDIANAPOLIS, IND.



**Sigma Cyclonome® Stepping Motor**

## Even a simple flip-flop can drive it

This is a typical Sigma Cyclonome drive circuit. Uncomplicated. Economical. Reliable. It requires no special input sequencing or phase shifting, thus bypassing the complicated and costly drive sources usually required by other stepping motors. In fact, the motor will operate from any source that provides current reversals or successive pulses—60 cps line, variable frequency oscillators, flip-flop circuits, relay drive, manual switching, commutating.

With any of these unusually simple and reliable drive sources, the Cyclonome Stepping Motor:

- Delivers precise 18° steps—at a rate of up to 1,000 steps per second.
- Provides up to 5 inch-ounces of torque.
- Maintains higher holding torque without standby power.
- Occupies as little as 1 cubic inch of space.

Cyclonome Stepping Motors are at work in

a wide variety of applications...chart and tape drives, analog-digital converting, impulse counting, step servos, remote positioning, timing, synchronizing.

A Sigma Application Engineer will be glad to help you put the Cyclonome Stepping Motor and its drive circuitry to work in your particular application. Or perhaps you would first prefer to read more about it. If so, send for a copy of the Cyclonome Drive Circuit Bulletin. Write to Dept. D1.

**SIGMA DIVISION**  **SIGMA INSTRUMENTS INC.**  
Assured Reliability With Advanced Design/Braintree 85, Mass.

**Sigma's Cyclonome Stepping Motor is reliable because it's simple: only one part moves.**



This cutaway view of the Cyclonome Stepping Motor reveals its unique simplicity. Its only moving part is a rotor without windings, without brushes. The precise, incremental rotation of the rotor is due solely to magnetic force. For a

complete description of the Cyclonome Stepping Motor's design, construction, operating sequence and application possibilities, send for your copy of Cyclonome Stepping Motor Basic Bulletin. Write to Dept. C3.

Circle Service No. 37

Statically Determinate Non-Coplanar Force		
Systems, Analysis of . . .	June 26	86
Strength, Shell . . . . .	Mar. 20	82
Stress, Combined, of		
Irregularly Shaped		
Section . . . . .	Sept. 18	106
Stress in Rings . . . . .	Nov. 13	116
Stresses, Discontinuity, in		
Pressure Vessels . . . . .	Mar. 20	87
Stresses, Shear and		
Compressive, in		
Rectangular Keys . . . . .	Feb. 20	80
Stresses, Unit, in Force Fits,		
Nomograms for		
Allowances and . . . . .	Dec. 11	103
Surface Area of an		
Ellipsoid . . . . .	Mar. 6	93

Tapers, Slopes and Their		
Angles . . . . .	July 10	66
Temperature Rise of		
Wirewound		
Components,		
Determining . . . . .	Oct. 16	89
Thin Circular Cylinder . . . . .	Oct. 2	110
Torsional Deflection at		
Tooth of Pinion . . . . .	Oct. 16	86
Translating Followers, Cam		
Mechanism with . . . . .	Nov. 27	92
Transmission, Power,		
Determining Shaft		
Size for . . . . .	July 24	64
Triangles, Plane,		
Nomograms for		
Evaluating . . . . .	Oct. 2	107
Trigonometric Functions for		
a Circle Divided into		
Equal Parts . . . . .	May 15	203
Trigonometric Functions for		
Fractional Parts of a		
Right Angle . . . . .	May 15	199
Trigonometric, Rational,		
Functions . . . . .	May 29	42

Vessels, Pressure,		
Discontinuity Stresses		
in . . . . .	Mar. 20	87
Vibration Frequency		
Charts . . . . .	Apr. 3	84
Viscosity Conversion		
Chart . . . . .	Nov. 13	120
Volume and Weight,		
Specific Gravity . . . . .	Jan. 9	63

Weight and Volume,		
Specific Gravity . . . . .	Jan. 9	63
Wire Sizes, Determining		
Helical Spring . . . . .	Apr. 3	88
Wirewound Components,		
Determining		
Temperature Rise of . . . . .	Oct. 16	89

For Free Reprints of the Above Article, Circle Service No. 527

Circle Service No. 38 ♦